




Ricardo  
Energy & Environment


Thermal Treatment



# Introduction: Thermal treatment

- Technologies using high temperatures to treat waste (or RDF)
- Commonly involves thermal combustion (oxidation)
  - Reduces waste to ash (MSW c. 30% of input)
  - Facilitates energy recovery as electricity and heat
- Alternative advanced ‘conversion’ technologies (ACT)
  - Advanced thermal treatment (ATT)
  - Most common gasification (limited O<sub>2</sub>) and pyrolysis (no O<sub>2</sub>)
  - Convert waste into intermediate products (fuels, chemicals)

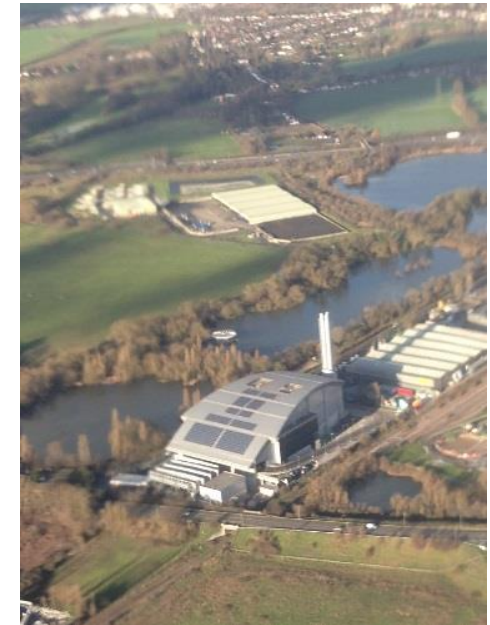

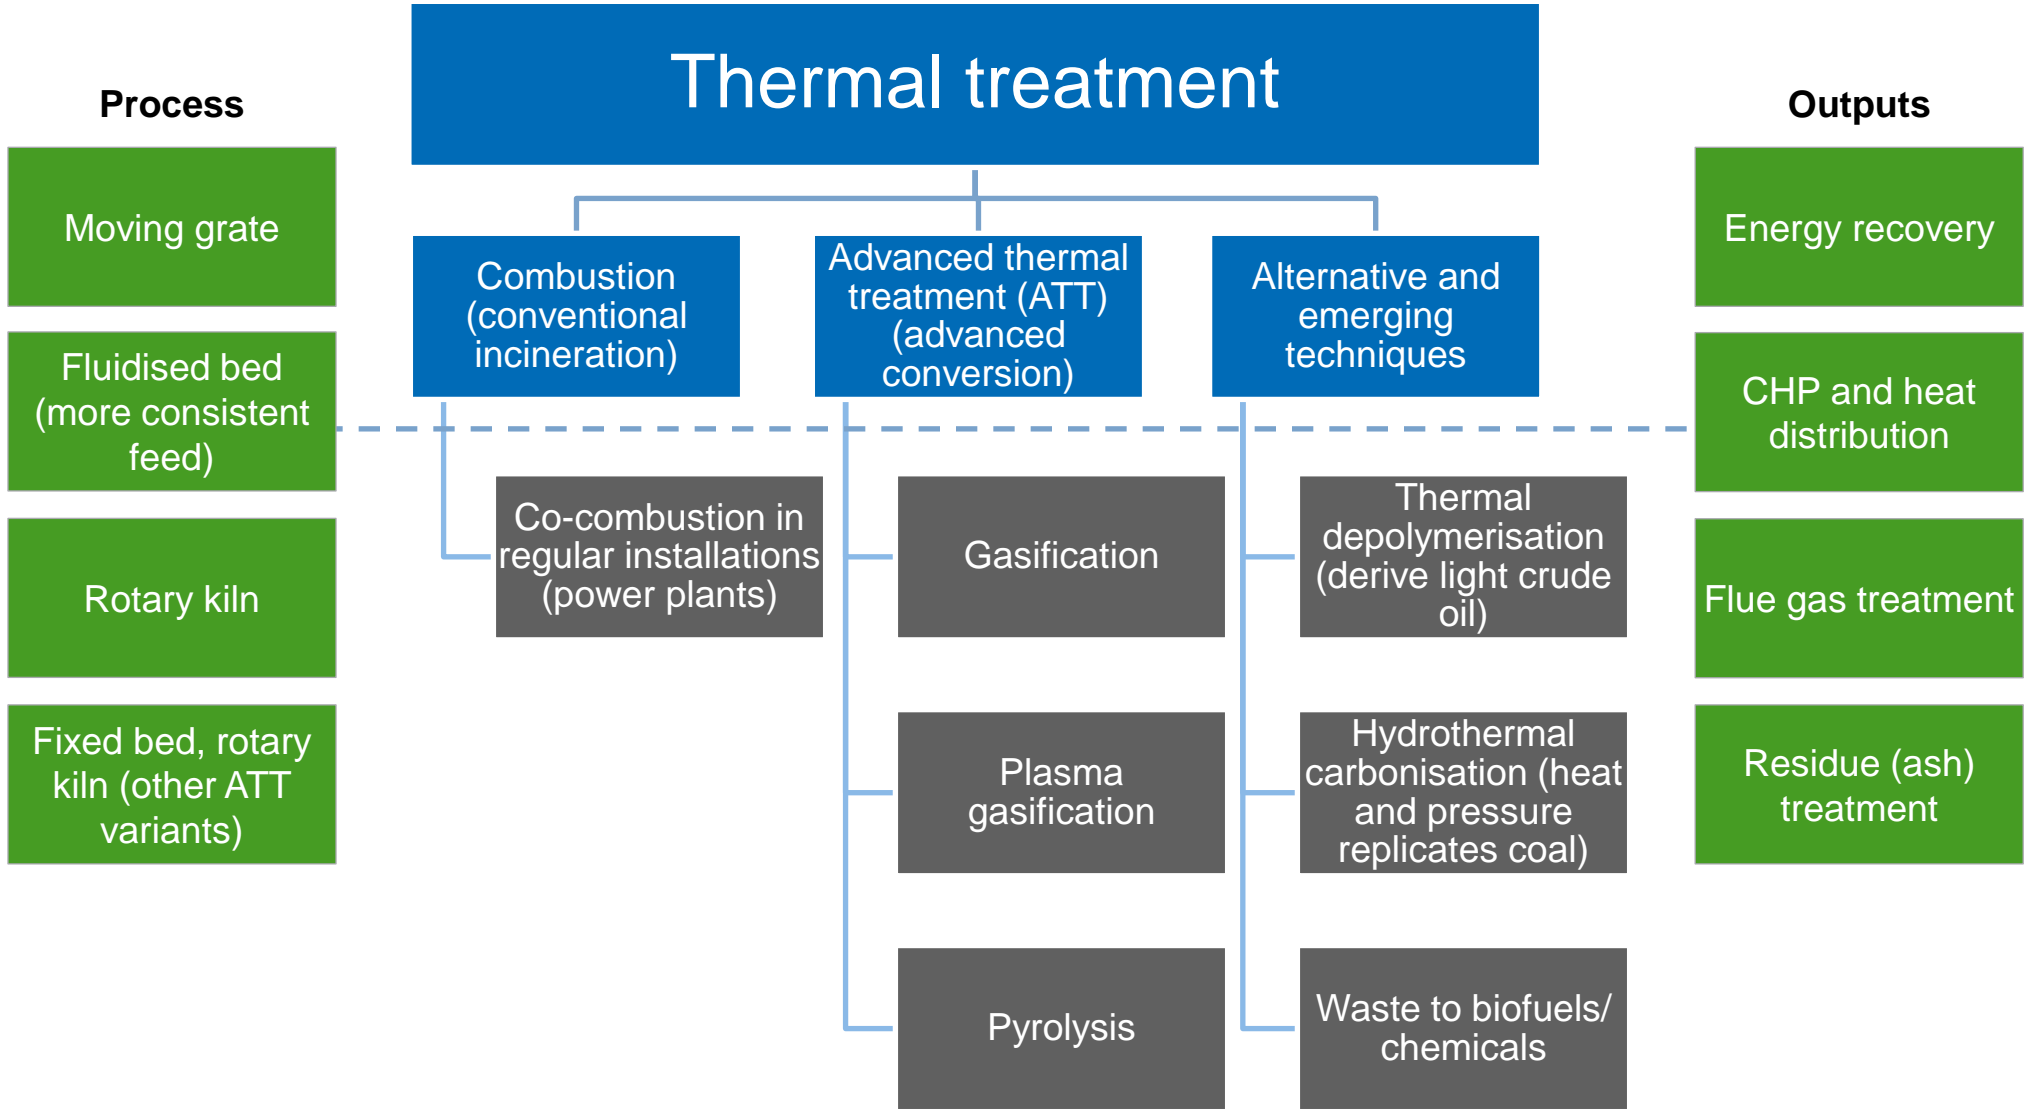

- Combustion (incineration) – burning waste to recover energy

Combustion in a furnace at high temperatures (European Directive 850°C for at least 2 seconds)

Energy in waste converted to heat (hot gases)

Gases pass to a boiler (option integrated furnace-boiler)

Heat transferred into hot water to produce superheated steam

Steam generates electricity via a turbine

Heat recovered in CHP (Combined Heat and Power) mode


- Outputs
  - Bottom ash – commonly recovered (metals & aggregate)
  - Air pollution control residues – landfilled (hazardous)
- Co-combustion (power plant) as secondary fuel



Economic and carbon savings




Incineration Directive compliance

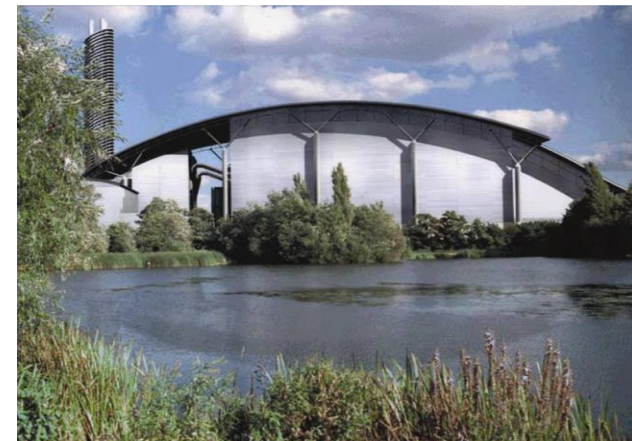

# Direct Combustion – Schematic

- Scale c. 50,000-750,000 tonnes/year
- Generally configured in 'lines'
  - c. 200-250,000 tonnes/line
  - Multi-line plants have redundancy
- Capex affected by economies of scale

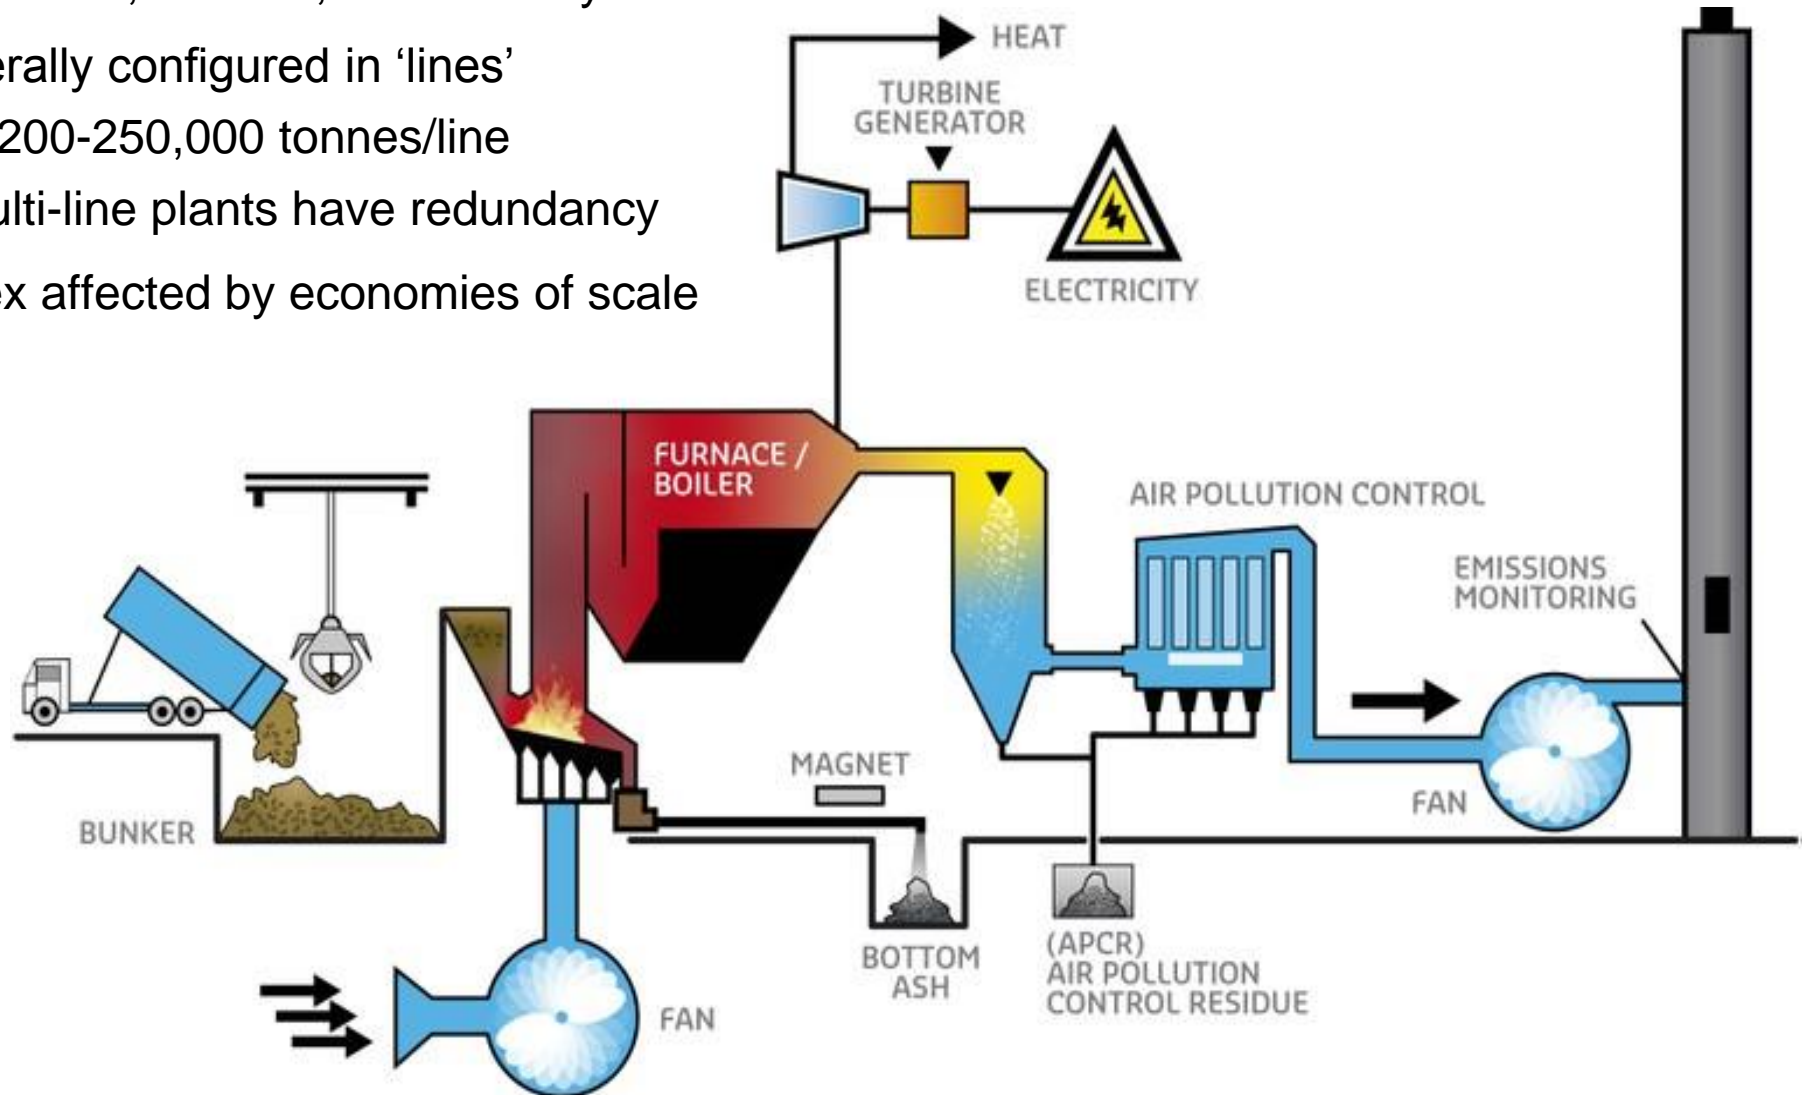

# Combustion – Advantages and Disadvantages

## Advantages

- Renewable energy
- Established, mature, reliable
- Widely deployed
- Fully enclosed
- Significant experience on wide range of feedstocks
- Process multiple fuels
- Tolerant of fluctuations in fuel quality and composition
- Destroy biodegradable content
- Reduce volume 70-95%
- Potential high efficiency CHP (50-60%)
- Option for cooling (CHP plus absorption chiller) = CCHP

- May limit recycling initiatives
- Feedstock security
- Requires sophisticated gas cleaning, monitoring, control (high Capex)
- APCr is hazardous waste
- Electrical efficiency c. 20-30%
- Poor public image & acceptance
- Potential political and planning challenge
- Heat customers need to be close

## Disadvantages



## *Treatment*

## *Oxygen Level*

## *Energy Form*

Energy from Waste  
(Incineration)

Excess of Oxygen

Heat,  
Electricity

Gasification


Limited Oxygen

Gas, Char

Pyrolysis

Absence of Oxygen

Gas, Char,  
Liquid (Oil)



# Thermal Treatment: Gasification

- Partial oxidation (combustion) in low oxygen atmosphere
  - $O_2$  lower than required to combust
- Successful schemes often use homogeneous wastes
- Waste reacts chemically
  - Degrades into chemical compounds
  - Forms synthesis gas ('syngas')
  - Mixture of  $CO_2$ , H, CO,  $CH_4$ , and steam
- Syngas leaving the reactor chamber can be:
  - Combusted immediately
  - Quenched & cleaned for fuel gas for power generation
- Syngas can be used in higher efficiency generating plant
  - e.g. gas engines or gas turbines
  - Gas must be good enough quality
  - Gas cleaning likely to be required
  - Technical challenge to maintain engines
- In principal may be lower air emissions than conventional WtE





- Many variants, core variants include:

## Plasma gasification



Very high temperature  
Cleaner syngas  
Energy intensive  
Limited references

## 2-stage gasification

1 gasification – 2 combustion  
Require pre-treatment  
Efficiency < conventional WtE  
Some references

## Direct melting systems

No pre-treatment, range of waste  
Coke and limestone addition  
Energy intensive  
Many references (Japan)

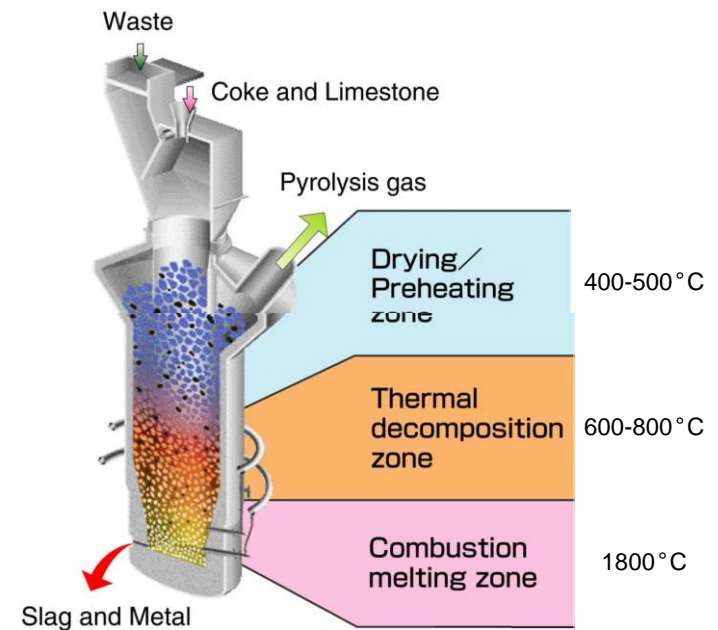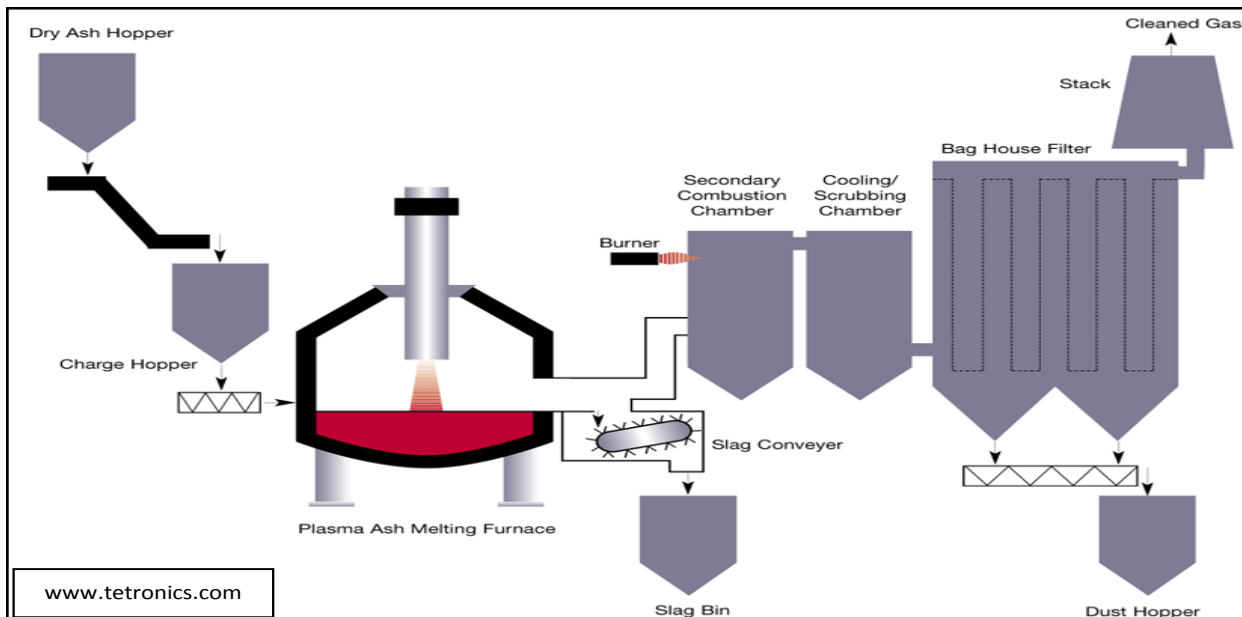

# Gasification – Advantages and Disadvantages

## Advantages

Allows use of efficient power generating technologies (reciprocating engines and gas turbines)

Low NO<sub>x</sub> & SO<sub>x</sub> emissions due to process occurring in a low oxygen environment

Better volume reduction than combustion or pyrolysis

Variants vitrify heavy metals in 'inert' slag

Seen as advanced alternative to incineration – more acceptance

May realise lower emissions

Some variants treat wide range of waste

Significant technical residual risk in gas cleaning for power production

Limited feedstock variability (depends on variant)

Some limitations on type and mix of feedstock to ensure syngas has high CV

Limited experience operating gasifiers with MSW

Reciprocating engines and gas turbines very sensitive to syngas contaminants

High profile project failures may impact financial backing

Higher Capex than conventional WtE tonne-for-tonne



## Disadvantages

# Thermal Treatment: Pyrolysis

- Thermal degradation in absence of oxygen
  - Organics and some inorganics (e.g. tyres)
  - Can accept liquid fuels
  - Mature for fossil fuels but limited for waste fuel
  - Successes primarily tyres and woodchip
- Pyrolysis converts feedstock into three outputs:
  - Fuel gas (syngas)
  - Char (or biochar)
  - Liquid fuel (pyrolysis oil or bio-oil)
- Fast (flash) or slow variants define products
  - Flash can derive speciality chemicals
- Plasma pyrolysis converts high CV waste (plastics) to diesel
  - Reverses plastic production process – challenging
  - Gases – condensed to distillate – refined to diesel
- Syngas can use higher efficiency generating plant
  - Proportion of feedstock energy content fuels the process



# Advanced Thermal Treatment: Outputs and Applications

